


700 Series 6 Terminal Conventional 2-wire Base - 100 mm

The DB702 is a conventional fire detector base used for all 700 series conventional fire detectors. It includes a normally closed continuity switch to allow for easy cable testing during installation. Inserting a detector into the base “opens” the continuity switch in the base to allow for standard open circuit monitoring. A locking mechanism implementation in conjunction with the detector allows for the detector to be safeguarded against unauthorized removal.

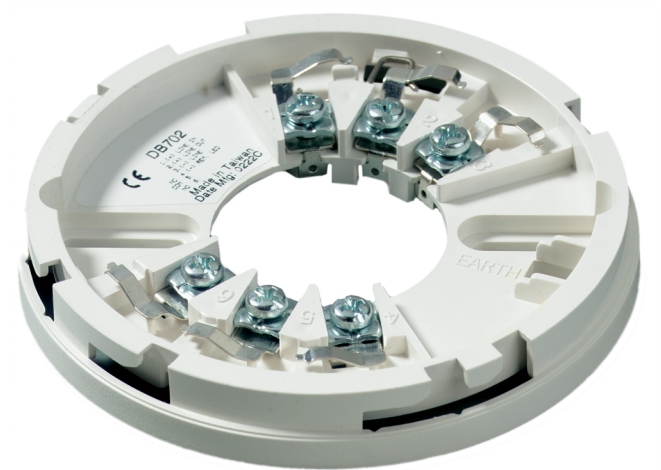

- Insert detectors without using force
- One way only fit
- Locking mechanism provided

DB702

700 Series 6 Terminal Conventional 2-wire Base - 100 mm

Technical specifications

General

Compatibility	Aritech 700 series detectors
Connectivity	2-wire zone with COM/NO/NC or remote indicator

Physical

Physical dimensions	100 x 9 mm (Ø x H)
Net weight	42 g
Colour	Cloud white (RAL 9001)
Mounting type	Base mount, Ceiling mount
Cable entries	1
Material (body)	Plastic
Terminals	6

Environmental

Vandal proof	No
Operating temperature	-10 to +50°C
Storage temperature	-10 to +70°C
Relative humidity	10 to 95% noncondensing
Environment	Indoor
IP rating	IP30

Standards & regulation

Compliance	CE, REACH, RoHS 2, WEEE
Certification	CPR

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 23 July 2020 - 10:05

