



## Main

Range of product	Modicon M340 automation platform
Product or component type	Ethernet TCP/IP network module
Concept	Transparent Ready
Integrated connection type	Ethernet TCP/IP RJ45 10/100 Mbit/s 1 twisted pair transparent ready class B30
Protective treatment	TC

## Complementary

Communication service	Bandwidth management Data Editor (via PC terminal) FDR server Rack Viewer SNMP network administrator Global Data I/O scanning Modbus TCP messaging Web server configurable
Port Ethernet	10BASE-T/100BASE-TX
Memory description	Supplied Flash memory card (BMXRWSC016M)
Memory usage	Application saving Activating the standard web server
Supply	Internal power supply via rack
Marking	CE
Local signalling	1 LED (green) for activity on Ethernet network (ETH ACT) 1 LED (green) for processor running (RUN) 1 LED (green) for status of Ethernet network (ETH STS) 1 LED (red) for data rate (ETH 100) 1 LED (red) for memory card fault (CARD ERR) 1 LED (red) for processor or system fault (ERR)
Control type	RESET push-button cold restart

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.

Current consumption	90 mA at 24 V DC
Module format	Standard
Net weight	0.2 kg

## Environment

Ambient air temperature for operation	0...60 °C
Relative humidity	10...95 % without condensation
IP degree of protection	IP20
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	247 g
Package 1 Height	5.5 cm
Package 1 width	11 cm
Package 1 Length	12 cm
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Weight	3.905 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm

## Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Modules Mounted on Racks

Dimensions

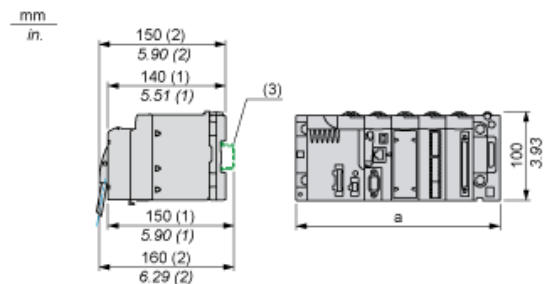

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81